



Type N male to SMA female Adapter

P/N P1-ADP-NPSS/SMAJSS

Electrical (Typical)


Impedance: 50 Ohms
 Frequency Range: DC - 18 GHz
 VSWR:
 1.25 : 1 (Max) for DC₀ - 18 GHz₀
 Operating Temp Range: -65 C - +125 C

	Materials	Finish
Body/Coupling Nut	Stainless steel	Passivated
Center Conductor	BeCu Alloy	Gold over Nickel
Gasket	Silicone Rubber	---
Captivation	Epoxy	---

Mechanical (Typical)

Connector: Mates with MIL-STD-348

RoHS Compliant: YES

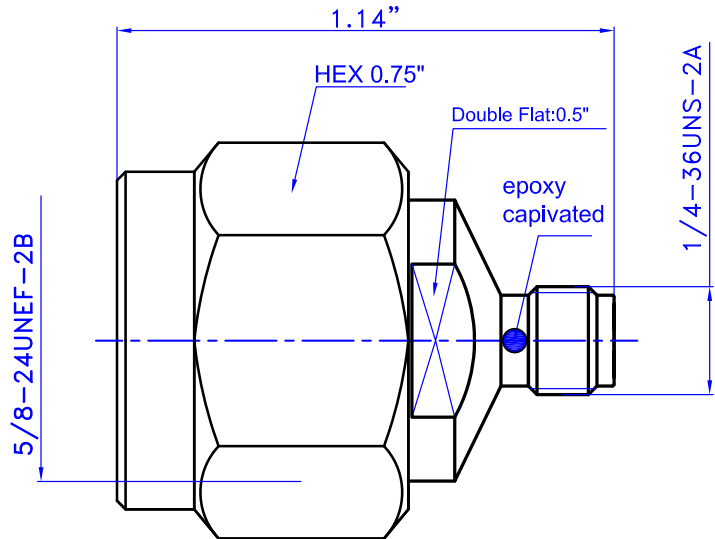

All dimension are in inches		SIZE A	SCALE NO	P1dB	
		REV. A	SHEET 1/1		
DRAWING BY: Z. Luo	DATE: 8/3/2010	PART NO. P1-ADP-NPSS/SMAJSS		TITLE Type N Male to SMA Female Adapter	
CHECKED BY: S. Jlang	DATE: 8/3/2010				
APPROVED BY: R. Kraemer	DATE: 8/3/2010				