



# Type N male to SMA male Adapter

## P/N P1-ADP-NPSS/SMAPSS

### Electrical (Typical)


Impedance: 50 Ohms  
 Frequency Range: DC - 18 GHz  
 VSWR:  
     1.25 : 1 (Max) for DC - 18 GHz  
 Operating Temp Range: -65 °C - +125 °C

	Materials	Finish
Body/Coupling Nut	Stainless steel	Passivated
Center Conductor	BeCu Alloy	Gold over Nickel
Gasket	Silicone Rubber	---
Captivation	Epoxy	---

### Mechanical (Typical)

Connector: Mates with MIL-STD-348

RoHS Compliant: YES

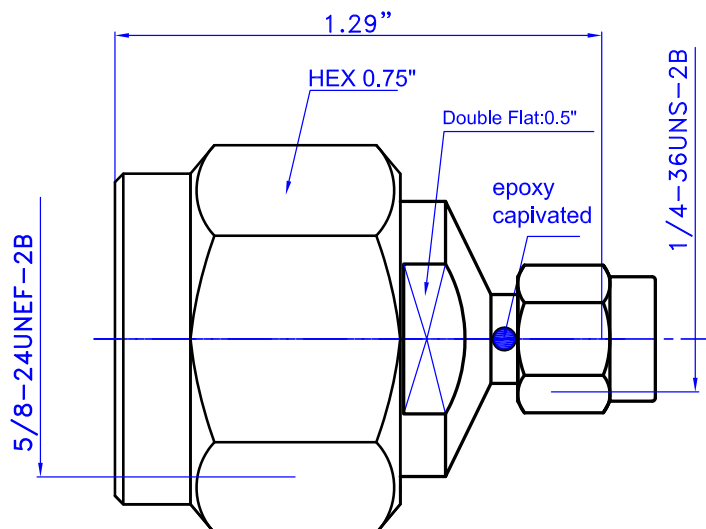

All dimension are in inches		SIZE A	SCALE NO	<b>P1dB</b>	
DRAWING BY: Z. Luo	DATE: 8/3/2010	REV. A	SHEET 1/1		
CHECKED BY: S. Jiang	DATE: 8/3/2010	PART NO. P1-ADP-NPSS/SMAPSS		TITLE Type N Male to SMA Male Adapter	
APPROVED BY: R. Kraemer	DATE: 8/3/2010				